


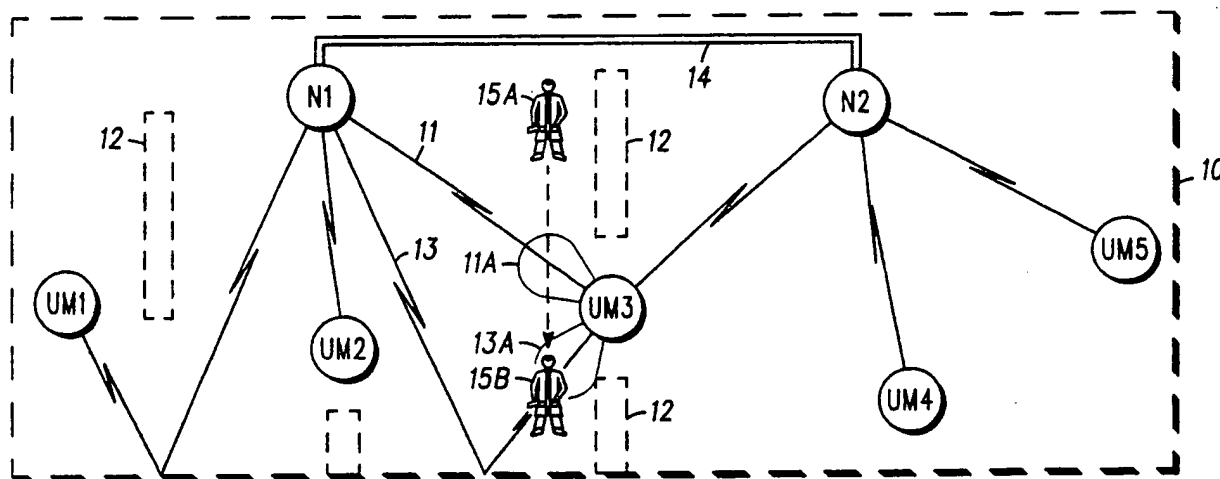

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04B 7/00, 17/02, H01Q 3/02 H04Q 7/00	A1	(11) International Publication Number: WO 92/13398 (43) International Publication Date: 6 August 1992 (06.08.92)
(21) International Application Number: PCT/US91/07695 (22) International Filing Date: 16 October 1991 (16.10.91) (30) Priority data: 641,373 15 January 1991 (15.01.91) US (71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: CHANG, Hungkun, J. ; 1609 Cambourne Lane, Schaumburg, IL 60194 (US). DOSS, William, Kevin ; 535 Ida Court #1, Mount Prospect, IL 60056 (US). NO-LAN, Michael, P. ; 1239 Tracie Drive, Lake Zurich, IL 60047 (US). BUCCHOLZ, Dale, R. ; 1441 East Anderson Drive, Palatine, IL 60067 (US). FREEBURG, Thomas, A. ; 416 North Belmont Avenue, Arlington Heights, IL 60004 (US). MCKOWN, John ; 1217 South Old Wilke Road, Arlington Heights, IL 60005 (US). WHITE, Richard, E. ; 980 Milford Street, Cary, IL 60013 (US).		(74) Agents: PARMELEE, Steven, G. et al.; Motorola, Inc., Intellectual Property Dept., 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i>

(54) Title: ANTENNA PATTERN SELECTION FOR OPTIMIZED COMMUNICATIONS AND AVOIDANCE OF PEOPLE

**(57) Abstract**

An antenna selection technique is used in an RF communication system in which user modules (UM1-UM5) communicate with at least one node (N1-N2). The UM's (UM1-UM5) and nodes (N1, N2) each have multiple antennae. The combination of each UM and node antenna is evaluated at the UM. Based on at least signal quality, the UM (UM1-UM5) selects its antenna and the best node antenna for use. An alternate antenna is selected if a person is determined to be present in a predetermined area adjacent a UM (UM1-UM5) corresponding to a predetermined RF power level.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

- 1 -

5 **ANTENNA PATTERN SELECTION FOR OPTIMIZED
COMMUNICATIONS AND AVOIDANCE OF PEOPLE**

10 **Background of the Invention**

10 This invention generally addresses a communications system in
which a plurality of spatially separated devices utilize RF
communications and more specifically addresses a method for selecting
the best antenna pattern from among several choices of antenna
15 patterns. This invention is especially suited for, but not limited to, an
environment in which multipath signals and fading problems are
significant such as in an RF communication system located inside a
building. It also addresses antenna selection techniques which take the
presence of people into account.

20 It is generally known that directive antenna patterns can be utilized
to enhance RF communications between remote RF transceivers. It is
also generally known that various means exist for controlling an antenna
radiation pattern such as by rotating a highly directional antenna,
controlling the phasing of different antenna elements to electronically
25 steer the primary beam or radiation pattern, and the selection of different
directional antennas targeted at different locations.

30 Methods for selecting an optimal antenna pattern vary greatly
depending upon the environment. In microwave line of sight
communication applications, the antenna pattern selection is simple: just
orient highly directional antennas pointing at each other. Physically
separated antennas may be utilized by an RF transceiver to enhance
communications that are not line of sight. In such diversity applications
each antenna may be monitored with the antenna having the optimal

- 2 -

signal being selected for use or all of the antennas may be combined utilizing the proper phasing to generate an enhanced single signal.

5 A number of factors make the problem of antenna pattern selection difficult. The reception of multipath signals, i.e. receiving the same signal at different times with different signal strengths from different geographic locations, greatly complicates antenna pattern selection. The constant fading of signals also adds to the problem. These factors are present inside a building in which RF transceivers communicate using the 1-100 GHz (gigahertz) frequency range. The relatively close distances
10 between the antennae and reflectors, such as walls, floors, ceilings and other metal objects large relative to the wavelength, result in strong multipath signals. Continuous fading results from environmental changes such as the movement of people or objects. It is generally desirable to minimize a person's exposure to RF radiation. There exists
15 a need for an antenna pattern selection method which optimizes communications in such an environment.

Brief Description of the Drawings

20 FIG. 1 is a diagram of an RF communication system employing an embodiment of the present invention.

FIG. 2 is a block diagram which shows an exemplary embodiment of an RF transceiver with antenna selection in accord with the present invention.

25 FIG. 3 is a table illustrating different antenna performance measurements made in accordance with an embodiment of the present invention.

FIG. 4 is a flow diagram illustrating an embodiment of a method in accordance with the present invention for generating the initial
30 performance measurements used in the table shown in FIG. 3.

FIG. 5 is a flow diagram in accordance with an embodiment of the present invention for selecting the best performing antenna at a node.

- 3 -

FIG. 6 is a flow diagram in accordance with an embodiment of the present invention illustrating a method for continuously updating and selecting the best antenna for use at a user module.

FIG. 7 is a flow diagram in accordance with an embodiment of the present invention illustrating a method for continuously evaluating and selecting the best antenna for use at a node.

Description of a Preferred Embodiment

FIG. 1 shows an illustrative RF communications system having nodes N1 and N2, and user modules UM1-UM5. The nodes and user modules each include an RF transceiver enabling each user module (or remote device) to communicate with the nodes. The outside wall of one floor of a building is represented by dashed line 10. Interior walls 12 divide the space into different areas. In the illustrated example, interior walls 12 do not pass RF energy and in practice may constitute moveable metal walls in an office environment.

Node N1 communicates with user modules UM1-UM3. Node N2 communicates the user modules UM3-UM5. Thus, user module UM3 represents a common cell capable of communicating with either node. Node N1 can also communicate directly with Node N2 by wire communication channel 14. Thus, each of the user modules can communicate with any of the other user modules in this system. It should be noted that a user module such as UM1 may not have a line of sight path to any node and thus must utilize a communications path including at least one reflection. It will be apparent to those skilled in the art that UM's with a line of sight communication path to a node will also receive multiple reflected signals.

Module UM3 can communicate with node N1 by direct path 11 or path 13 which includes one reflection off of wall 10. Beamwidths 11A and 13A extend from module UM3 about paths 11 and 13, respectively, and represent areas in which the power of signals transmitted from UM3 using these paths are at or above a predetermined magnitude. It is desired that people avoid prolonged exposure to radiation at such

- 4 -

magnitudes. Assume that the person shown in Fig. 1 begins to walk from position 15A to position 15B, and that UM3 is transmitting over path 11. UM3 will switch to path 13 shortly after the person enters area 11A and will continue to use that path as the person approaches area 13A.

- 5 Shortly after the person enters area 13A UM3 will switch back to using path 11 and will continue to use path 11 until a person enters area 11A or the propagation deteriorates such that another path provides a better communications path. The means used by the user module for avoiding prolonged radiation on paths where people are in the predetermined
10 areas will be explained below.

FIG. 2 illustrates an exemplary embodiment of an RF transceiver 16, an antenna selector 18 and a plurality of selectable directive
15 antennas A1-A6 which maybe used as part of either a node or user module. In this illustrative embodiment six unidirectional antennae with 60 degree beam widths are located in a generally horizontal plane to give 360 degree pattern coverage. A data input/output channel 20 may be coupled to one or more data devices. In the case of a user module, channel 20 could be coupled to a personal computer, an Ethernet port, or a digitized voice source. If utilized as a node, the data input/output
20 channel 20 may consist of a wireline data communications link 14 with other nodes and may also be coupled to other data devices. The transceiver 16 contains a conventional receiver for receiving RF signals including appropriate demodulation and decision making circuitry for decoding received signals into corresponding data. The transceiver also
25 contains an RF transmitter with suitable modulation and encoding circuitry to encode data to be transmitted over the RF carrier. The RF signals transmitted and received by receiver 16 are coupled to antenna selector 18 by cable or waveguide 22.

30 The antenna selector 18 is capable of selecting any one of the six antennas A1-A6 for use by transceiver 16. In order to rapidly select one of the available antennas, electronic switching is preferably utilized to select the desired antenna. Of course, conventional mechanical switching can be utilized if suitable for the particular application. The antenna selector contains a microprocessor and associated support

- 5 -

circuitry for determining which antenna should be utilized as will be explained in detail below. At microwave frequencies, the antennae may constitute horn antennae or other directive antennae and are preferably arranged to provide complete 360 degree coverage in a horizontal plane with appropriate vertical beam widths to provide latitude for the reception of signals from virtually any location relative to the node or user module. It will be apparent to those skilled in the art that the antenna selector 18 may be physically housed within transceiver 16 if desired.

In the illustrated embodiment of the present invention, communications between the nodes and user modules is accomplished using a time division multiple access system in which packets of data are transmitted. The nodes send packets containing an address and other related overhead information along with data destined for a user module which will recognize this information by means of its unique address. Similarly, the user modules transmit messages to a node addressed for the node itself or another user module. Part of the information transmitted by each node is the periodic transmission of reference packets which are received by the user modules. The bit error rate or other merit factor associated with the reception of the reference packets along with the signal strength is utilized in the antenna selection process which will be described below.

In FIG. 3 Table 24 consists of a matrix of numerical values which reflect a ranking of the antenna patterns, i.e. different antenna in this embodiment. A separate value is calculated for each of the combinations of antennas for a user module and a node, i.e. user module antennas 1i-6i and node antennas 1j-6j. In the illustrative embodiment, each user module maintains such a matrix for each node with which it can communicate. In the system as shown in FIG. 1, UM3 would maintain a separate matrix for N1 and N2; the other UM's would maintain a single matrix for the respective nodes.

Each user module generates a Table for each node with which it can communicate upon being put into service in such a system. In this system nodes and user modules utilize half duplex communications by sending information to each other. User modules preferably generate

- 6 -

the values for the matrix based upon data received from each node. The node transmits the reference packets of data periodically using each of its antennas 1j-6j and the user module receives the transmitted signals by periodically selecting each of its antennas 1i-6i. Thus, after 36 such communications Table 24 will have values for each cell. In a relatively high speed communications system, such as utilizing packet transmission techniques, transmitting and receiving the required reference signals to complete the Table can be accomplished in a relatively short time.

10 The calculation of the value for each cell in Table 24 is based on signal Quality (Q) and signal Strength (S) of the reference signal received by a user module antenna from a node antenna. Each received reference signal has a new rank (R) calculated as follows:

15 (1) $R = (q*Q) + (s*S)$

where q and s represent numerical weighting factors allowing the signal quality to be weighted differently than the signal strength. The selection of each of these weighting factors will be somewhat dependent upon the communications system and the anticipated environment. In a preferred embodiment of the present invention, the signal quality has a substantially greater importance than the signal strength and thus $q \gg s$, i.e. $q > 10s$. A conventional RF signal level sensing measurement may be utilized for signal strength. The signal quality may be measured by determining how many transmitted symbols exceed a predetermined receiver demodulation window or may be based upon other known signal quality type measurements such as bit error rate.

25 The historical rank (HR) of the signal for each cell in the matrix is the value stored in Table 24 and may be determined as follows:

30 (2) $HR = (k*HR) + ((1-k)*R)$

Where k is a weighting factor which weights the historical rating HR relative to a newly calculated new rating R, where $1 > k > 0$. In the

- 7 -

preferred embodiment the historical rank is weighted substantially higher than the new rank to prevent rapid changes in the cell value, i.e. $k > 0.5$ such as $k = 0.9$. This places more emphasis on the past history than on the current calculation. This does not introduce an excessive delay in selecting a different antenna when the table HR values are updated frequently, such as every 24 milliseconds. As will be described in more detail below, at least portions of this Table are being continually updated to take into account a changing environment or other factors.

After each user module completes a Table 24 for each of the nodes with which it can communicate, the user module makes a determination of the best node antenna. This determination is transmitted from the user module to each respective node thereby informing the node which of its antennas to use when communicating with the user module. The user module antenna to be utilized for each node is selected at the user module based upon the Table. Since the Table at the user module is based upon signals received from a node, it will be apparent to those skilled in the art that this system relies upon the principle of reciprocity in making the node antenna selection, i.e. it is assumed that the best antenna for transmitting from the node to the UM is also the best antenna for receiving signals from the user module. The antenna selection method according to the present invention allows additional user modules to be installed subsequent to initial system configuration with automatic reconfiguration and selection of the best antenna choices.

FIG. 4 is a flow diagram illustrating the initial generation of values for Table 24. Beginning at the START 26, variables n and i are set to 1 in steps 28 and 30. The variable n represents the number of times the entire Table has been calculated and i represents each user module antenna. In step 32 the reception of reference packets used for quality and signal strength determination is enabled on local antenna i . In step 34 parameter j is initialized to 1; j represents each node antennae. In step 36 the user module constructing the subject Table enables reception of a reference packet transmitted from node antenna j . Step 38 represents a time delay allowed for the user module to receive the

- 8 -

reference packet from the node. In step 40 a decision is made as to whether a new reference packet has been received. If YES, the new rank R of the received reference packet is calculated in step 42. If NO, the new rank is set equal to WORST which represents the worst possible new ranking assignable to a cell. Such a value is assigned to represent an unusable antenna combination since the reference packet was not received at all. The historical rank for the particular user module antenna and node antenna combination is calculated at step 46. The historical rating HR for each of the cells is stored in memory and is used for selecting the user module and node antenna to be utilized as will be described below.

In step 48, variable j is incremented by 1 thereby selecting the next node antenna to be utilized. A decision is made by step 50 to determine if the value of j exceeds the actual number of node antennas. A YES determination indicates it is within the maximum number of node antennas and steps 36-48 are repeated utilizing the same local antenna i but new node antenna j. A NO determination by step 50 indicates that the UM has had the opportunity to receive a referenced packet transmitted from each of the node antennae, using the same local UM antenna and the user module antenna i is incremented by 1 in step 52. Decision step 54 determines if the value i is within the maximum number of user module antennas. If YES, steps 32-52 are repeated in which the user module antenna receives reference packets from each of the node antennas j. A NO determination by step 54 means that each of the node antennas has transmitted to each of the user module antennas thereby completing a sample for each of the cells in Table 24. The variable n is then incremented by 1 in step 56. To avoid making an antenna decision based upon only one sample of each cell and to build a history of such cell values before making the initial antenna determination, decision step 58 determines if a sufficient number of samples of each of the cell values in Table 24 has occurred. If n has not yet achieved the required number of samples, a YES decision causes steps 30-56 to be reexecuted thereby generating another series of cell updates for the entire Table. A NO determination by step 58 represents that the predetermined number of

- 9 -

Table samples has been reached. This series of steps terminates as indicated by transfer to "A" 60. The parameter n will vary depending upon the system configuration and the relative importance placed upon the historical significance of the values of each cell in Table 24. In the
5 illustrative embodiment of the present invention, n is desirably greater than 10 and is preferably greater than 50 due to the emphasis on historical weighting.

FIG. 5 begins at entry point A 60 where variables j and i are each initialized to 1 representing node antenna $1j$, UM antenna $1i$ at steps 62 and 64. Step 66 in combination with steps 68 and 70 generate a value
10 equal to the sum of the values in column $1j$. This column summation represents a composite value of the overall performance of each node antenna. Determination step 70 ceases looping back to step 66 when all of the values associated with each of the UM antennas has been
15 summed for one node antenna. Step 72 selects the next node antenna to have a column summation of HR values. Decision step 74 causes the preceding process to continue thereby summing each of the columns representing node antenna values until all of the node antennas have a corresponding composite summation. A NO determination by decision
20 step 74 indicates that all node antennas have summations that have been calculated. In step 76, the node antenna with the composite summation j of the BEST sum identifies the node antenna to be utilized for communication with the corresponding user module. Step 77 ranks the UM antennae from best to worst based on the column in Table 24
25 associated with the registered or used node antenna. In step 78 the user module transmits the j node antenna selected to the node by a packet from the user module to the node. Thus, the node now knows which of its antennas to assign when communicating with this particular user module. The steps end at point "B" 80.

30 These steps are carried out at each user module for each node with which it can communicate. Thus, a Table 24 will be calculated for each node that can be "seen" by a user module. Although each node does not maintain a Table 24, it maintains in memory the antenna assigned to it by each user module for communications.

- 10 -

FIG. 6 is a flow diagram of an exemplary method in accordance with the present invention for determining and continuously reevaluating the best user module antenna. Before beginning these steps at point "B" 80, values for each cell in Table 24 will have been calculated and a node
5 antenna selected. Parameters n , j , and i are initialized to 1 by steps 82 and 84. Parameters i and j refer to user module antennas and node antennas, respectively. Parameter n will be explained below.

The reception of reference packets from node antenna j on local antenna i is enabled at step 86. A time delay is introduced by step 88 to
10 provide time for reception of the reference packet. Decision step 90 determines if a new reference packet was received. If NO, then the new rank R for the user module and node antenna combination is set equal to WORST, i.e. a very low rating value. Upon a YES decision by step 90 a new ranking is calculated by step 98. In step 100 the historical rank HR
15 for the subject antenna combination is updated to reflect the latest new ranking.

Decision step 101 determines if all node antennae j have been sampled. If YES then step 103 increments j and steps 86-100 repeat for the new node antenna. If NO by step 101, then decision step 102
20 determines if any user module antennas remain to be evaluated in a cycle in which each of the antennas are evaluated. A YES decision indicating more antennas are to be evaluated, causes step 104 to increment the user module antenna parameter i and a subsequent re-evaluation for that antenna by steps 86-100. A NO decision by step 102
25 indicates that all antennas have been reevaluated in a given cycle and the user module antennas are ranked from best to worst for the values in the column of Table 24 corresponding to the selected node antenna by step 106. The previous rankings for the user module antennae are maintained in memory. Decision step 108 determines if the latest
30 ranking represents a change in order for the best rated user module antenna. If YES, the local antenna is changed to the current best rated antenna by step 110. Following a NO decision by step 108 or following action by step 110, decision step 112 determines if the parameter n equals a predetermined value. This predetermined value is selected

- 11 -

such that the node antenna will be reevaluated less frequently than the evaluation of the user module antennas. For example, if $n = 50$, the node antennas would be reevaluated only after the user module antennas have been reevaluated 50 times. If the value of n has not yet reached this predetermined evaluation value, i.e. a NO decision by step 112, parameter n is incremented by step 114 and another cycle of user module antenna evaluations occur by steps 86-110. A YES decision by step 112 causes the node antenna to be reevaluated by going to point "C" 116.

Subjecting people to prolonged radiation from the user module is avoided by the continuous reevaluation process used in selecting the active user module antenna. Referring to FIG. 1, as a person enters area 11A which corresponds to the active antenna for UM3, the user module will be reevaluating its antennae. Because a person entering this limited distance zone, such as a maximum of 1 or 2 meters from UM3, will substantially alter and likely degrade the propagation of signals between UM3 and N1, the method according to FIG. 6 will cause another antenna at UM3 to be selected. When used in a packet signalling system having very short packet lengths relative to the normal speed at which a person moves this method will cause another antenna to be selected within a few seconds thereby minimizing radiation exposure.

FIG. 7 is a flow diagram of an illustrative embodiment of steps in accordance with the present invention by which the selected node antenna is continuously reevaluated. Beginning at "C" 116, parameters i and j are initialized to 1 by steps 118 and 120. Step 122 calculates a long term historical rating (LTHR) which is calculated in a similar manner to the historical rating (HR) previously defined. In this calculation the weighting factor K may be selected to be different than the weighting factor k for HR. This calculation step creates another table similar to Table 24 having the same format as Table 24 but representing an even longer term average of the values in Table 24. This table is utilized to provide an even greater historical weighting to the evaluation of the node antenna to be utilized. It should be remembered that Table 24 will have been created and updated a number of times before the long term

- 12 -

historical rating calculation in step 122 is made. Steps 124, 126, 128, and 130 combine with steps 120 and 122 to form a calculation nest by which each of the possible user module antennas and node antennas are reevaluated for the long term historical rating table. A YES
5 determination by step 128 represents that each of these calculations has been made. In step 132 a decision is made on whether the node antenna should be reselected. The decision criteria to cause a node antenna reselection (YES), requires that the historical rating for the selected user module and node antennae be less than a short term (ST)
10 threshold and that the long term historical rating for a selected antenna combination be less than a long term (LT) threshold. It should be noted that both the HR and LTHR requirements must be met. In the reference to LTHR [II, J] the II refers to the best long term value for a UM antenna in the registered J node antenna column in the long term table. It will be
15 appreciated that for a given node antenna, the best UM antenna i in the HR table may be different from the UM antenna II in the LTHR table. Different thresholds for each requirement can be selected to take into consideration the specific system configuration and environment. A YES determination by step 132 causes a return to point A60 and reselection of
20 a node antenna. A NO determination, causes a return to point "B" 80 resulting in the continued reevaluation of user module antennas.

Subjecting people to prolonged radiation from the node is avoided by the continuous reevaluation process used in selecting the active node antenna. In the preferred embodiment the node has the same type
25 directional antennae and effective radiated power as the user modules. Thus areas similar to those shown for UM3 in FIG. 1 exist relative to each node antennae. Because a person entering the limited distance zone adjacent the node will substantially alter and likely degrade the propagation of signals between N1 and a user module, the method
30 according to FIG. 7 will cause another antenna at N1 to be selected. When used in a packet signalling system having very short packet lengths relative to the normal speed at which a person moves this method will cause another antenna to be selected within a few seconds thereby minimizing radiation exposure. Although the antenna

- 13 -

reevaluation method according to FIG. 7 will be slower than that for a user module, it will still be fast enough to prevent any prolonged radiation of a person within an active area. Also, since the nodes are desirably placed at a central location relative to the users and at a high location in a room or building such as on the ceiling or on a support preferably at least 7 feet above the floor, it is less likely that people would normally occupy the defined radiation areas.

It is believed to be apparent to those skilled in the art that the illustrative method relating to antenna pattern selection can be advantageously employed as part of an overall operating system utilized to control other parameters and communications in an RF communication system. This method or selected parts of this method may be integrated into a central control program and may be carried out as background operations as time permits relative to other uninterruptable or priority tasks. Once basic communication is established between a user module and node, the continuing reevaluation of the proper antennas to be utilized may not be critical depending upon the operating environment.

In the illustrative embodiment, each user module contains a table of values and a corresponding long term table of values for each node with which it can communicate. In the illustrative half-duplex communications systems shown in FIG. 1 it is believed advantageous to have the user modules make antenna selection determinations since such determinations can be carried out in parallel based upon a single transmission from a node. This method also facilitates the joining of a new user module into an existing system since the complexity relating to antenna selection is distributed among the user modules and not concentrated at the nodes.

One of the advantages of this invention is its ability to select the most appropriate antennae for use without requiring calibration of the RF transceivers. Selection of the antenna to be used is based on relative comparisons.

A further advantage of this invention is its ability to minimize a person's exposure to RF radiation. In the illustrative embodiment of the invention the disruption of the propagation of signals between a UM and

- 14 -

a node is used as the means for limiting exposure to radiation within a defined area. Other means for limiting radiation exposure also be utilized. A low frequency amplitude modulation detector that is electrically at or near the transmitter as it feeds the antenna could be
5 used to detect the Doppler shift between the transmitted signal and the echo from a nearby moving object (person). Such a detection would be used to cause the selection of another antenna. Alternatively, a detection system could be employed that would be independent of the transmitted signal. An ultrasonic detector or an infrared (heat) detector could be
10 used to sense the movement or proximity of a person. Preferably such an independent detector(s) would have a directional capability consistent with the directional characteristics of the RF antennae so that antenna switching decisions could be easily made.

Although an embodiment of the present invention has been shown
15 and illustrated in the drawings, the scope of the invention is defined by the claims which follow.

- 15 -

Claims

1. A remote communications device capable of RF communication with a node comprising:

5 means coupled to said remote device for selecting an antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the remote device;

means for determining the quality (Q) of signals received from the node on each of said antenna patterns;

10 means for determining the strength (S) of the signals received from the node on each of said antenna patterns;

means for ranking each of said antenna patterns according to

$$R = (q * Q) + (s * S)$$

15

where R is the rank, q and s are numerical weighting factors;

said selecting means selecting the antenna pattern for use in communicating with the node based on said rankings.

20 2. The remote device according to claim 1 further comprising means for generating a historical average rank for each of said antenna patterns according to

$HR = (k * HR) + ((1-k) * R)$, where HR is the historical average rank, and $1 > k > 0$, said selecting means selecting the antenna pattern for use in

25 communicating with the node based on said historical average rank.

3. The remote device according to claim 1 further comprising means for periodically generating new rankings R based on new determinations of quality (Q) and strength (S).

- 16 -

4. A radio frequency (RF) communications system including a node and at least one remote device capable of RF communication with the node comprising:

5 means coupled to the remote device (RM) for selecting an RM antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the RM;

means coupled to the node for selecting a node antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the node;

10 means for generating a matrix of rankings of each remote device antenna pattern for each node antenna pattern based on signals communicated between the remote device and node, said rankings of remote device and node antenna patterns constituting rows and columns, respectively, in said matrix;

15 means for summing the rankings in each column in said matrix to generate column summations;

said node antenna pattern selecting means selecting the node antenna pattern corresponding to the largest column summation for use in communications with said remote device.

20

- 17 -

5. The system according to claim 4 wherein said means for generating a matrix of rankings includes:

means for determining the quality (Q) of signals received from each node antenna pattern on each of said device antenna patterns;

5 means for determining the strength (S) of the signals received from each node antenna pattern on each of said device antenna patterns;

means for ranking each combination of antenna patterns according to

10

$$R = (q * Q) + (s * S)$$

where R is the rank, q and s are numerical weighting factors.

15 6. A method for choosing one antenna pattern from among a plurality of antenna patterns coupled to a remote communications device capable of RF communication with a node comprising:

selecting an antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the remote

20 device;

determining the quality (Q) of signals received from the node on each of said antenna patterns;

determining the strength (S) of the signals received from the node on each of said antenna patterns;

25 ranking each of said antenna patterns according to

$$R = (q * Q) + (s * S)$$

where R is the rank, q and s are numerical weighting factors;

30 selecting the antenna pattern for use in communicating with the node based on the highest ranking.

- 18 -

7. The method according to claim 6 further comprising the step of generating a historical average rank for each of said antenna patterns according to $HR = (k * HR) + ((1-k) * R)$, where HR is the historical average rank, and k is a weighting factor where $1 > k > 0$, selecting the
- 5 antenna pattern for use in communicating with the node having the highest historical average rank.
8. A radio frequency (RF) communications system comprising:
- 10 a node capable of transmitting and receiving RF signals;
- means coupled to said node for selecting a node antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to said node, said node using said antenna pattern to transmit and receive said RF signals;
- at least one remote device (RM) capable of transmitting signals to
- 15 and receiving signals from said node;
- means coupled to said RM for determining the quality of signals received from the node on each of said node antenna patterns;
- means coupled to said RM for selecting the best node antenna pattern for communications with said node based on said signal quality
- 20 determinations;
- said RM transmitting a command to said node identifying said best antenna pattern, said selecting means being responsive to receipt of said command and causing said best antenna pattern to be selected.

- 19 -

9. A radio frequency (RF) remote module (RM) capable of RF communication with a communications system comprising:

means for selecting an RM antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the RM;

means for periodically generating a signal quality ranking for a plurality of remote device antenna patterns for said RM based on signals communicated between the RM and the communications system;

said selecting means selecting the RM antenna pattern having the best quality rank for communications between the RM and the communications system;

means coupled to said selecting means for limiting a person's exposure to RF radiation from said RM when the person is within a predetermined area adjacent said RM.

15

10. In a radio frequency (RF) communications system having a remote module (RM) capable of RF communications, a method of limiting a person's exposure to RF energy transmitted by the RM comprising the steps of:

20 selecting an RM antenna pattern from a plurality of directional antenna patterns that cover different geographic areas relative to the RM;

periodically generating a signal quality ranking for a plurality of remote device antenna patterns for said RM based on signals communicated between the RM and the communications system;

25 said selecting step selecting the RM antenna pattern having the best quality rank for communications between the RM and the communications system;

limiting a person's exposure to RF radiation from said RM when the person is within a predetermined area adjacent said RM.

FIG. 1

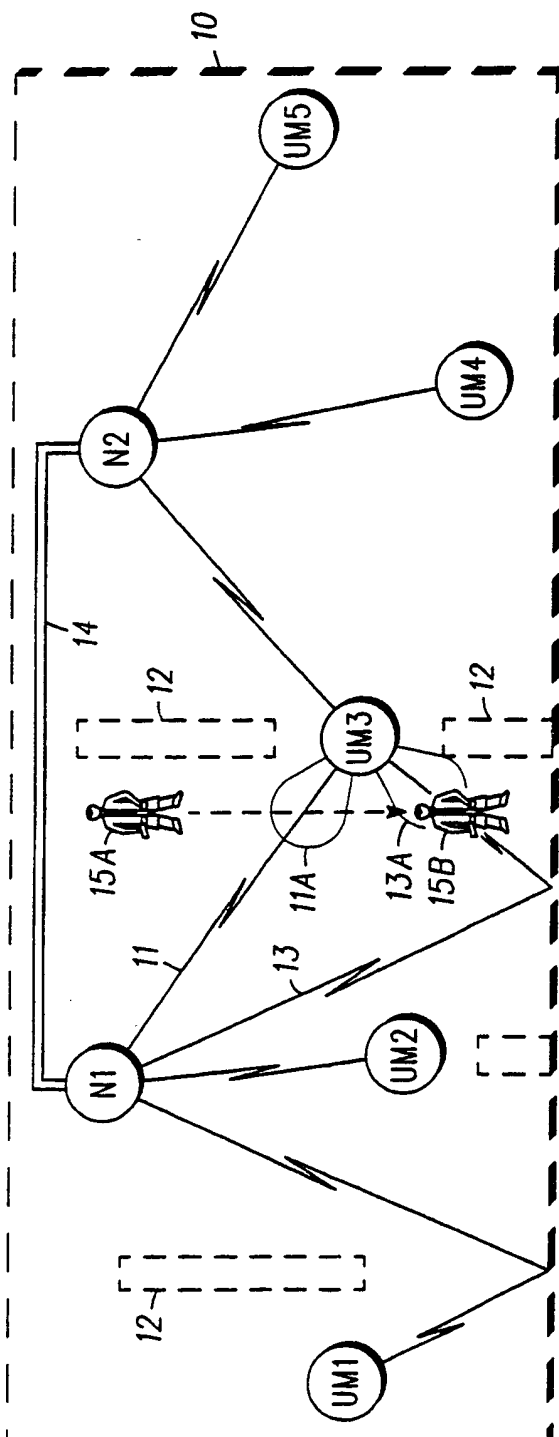


FIG. 3


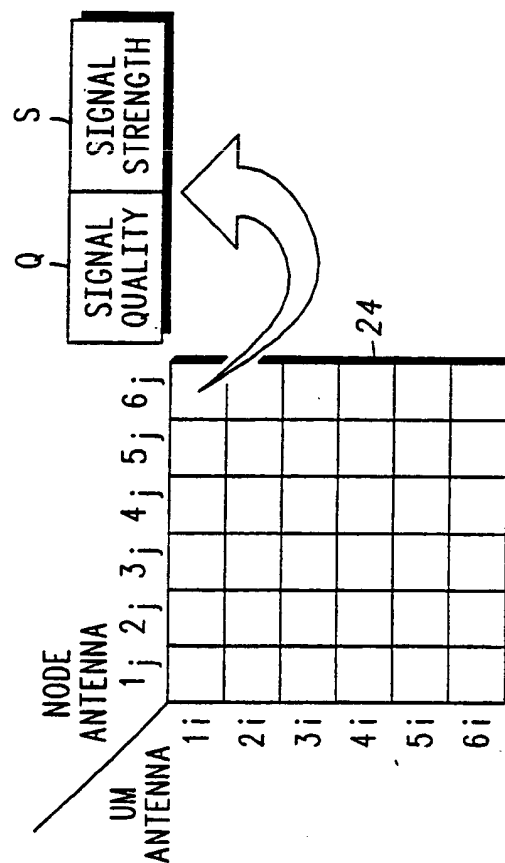


FIG. 2

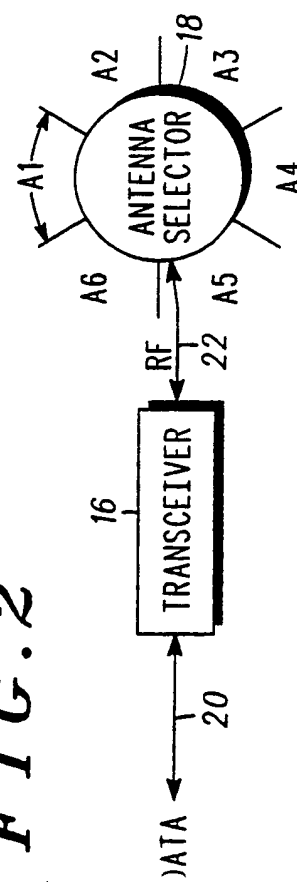

2 / 5

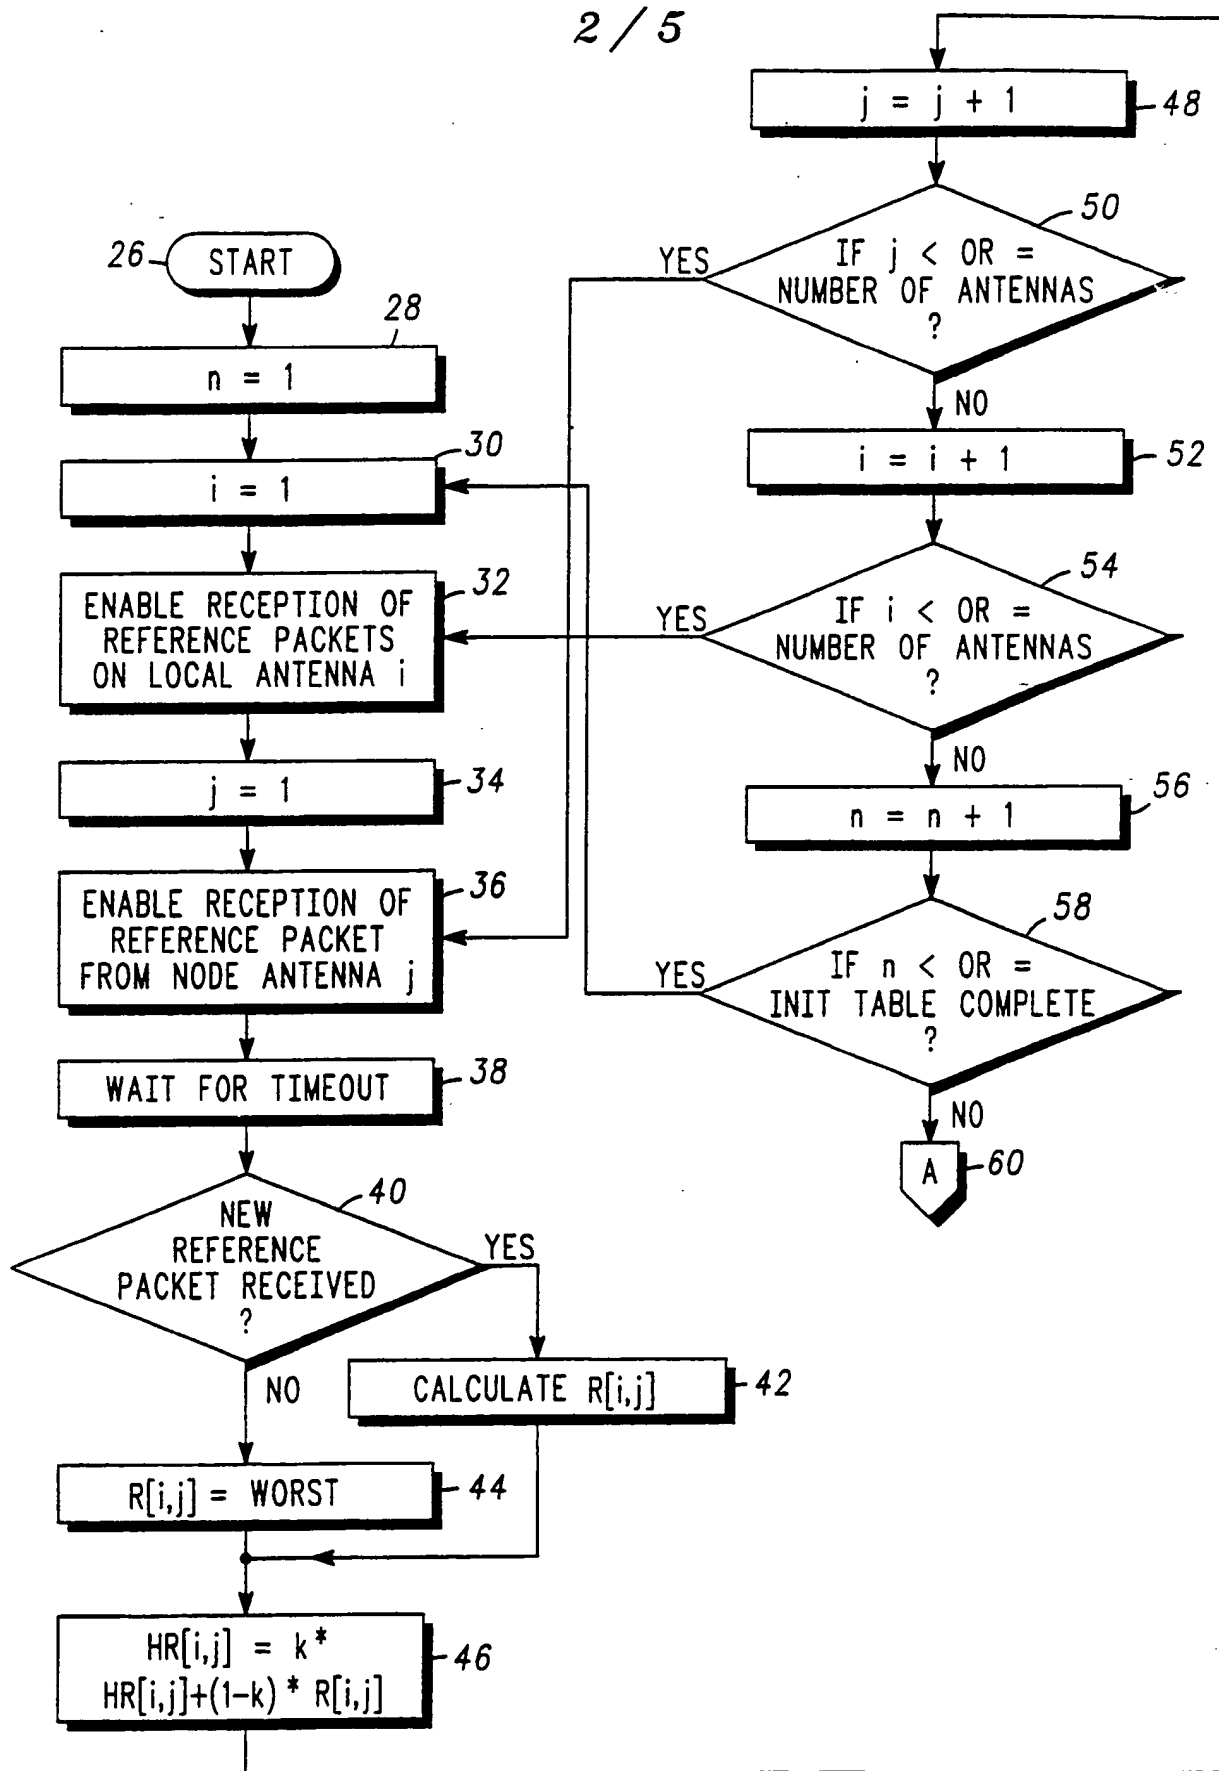


FIG. 4


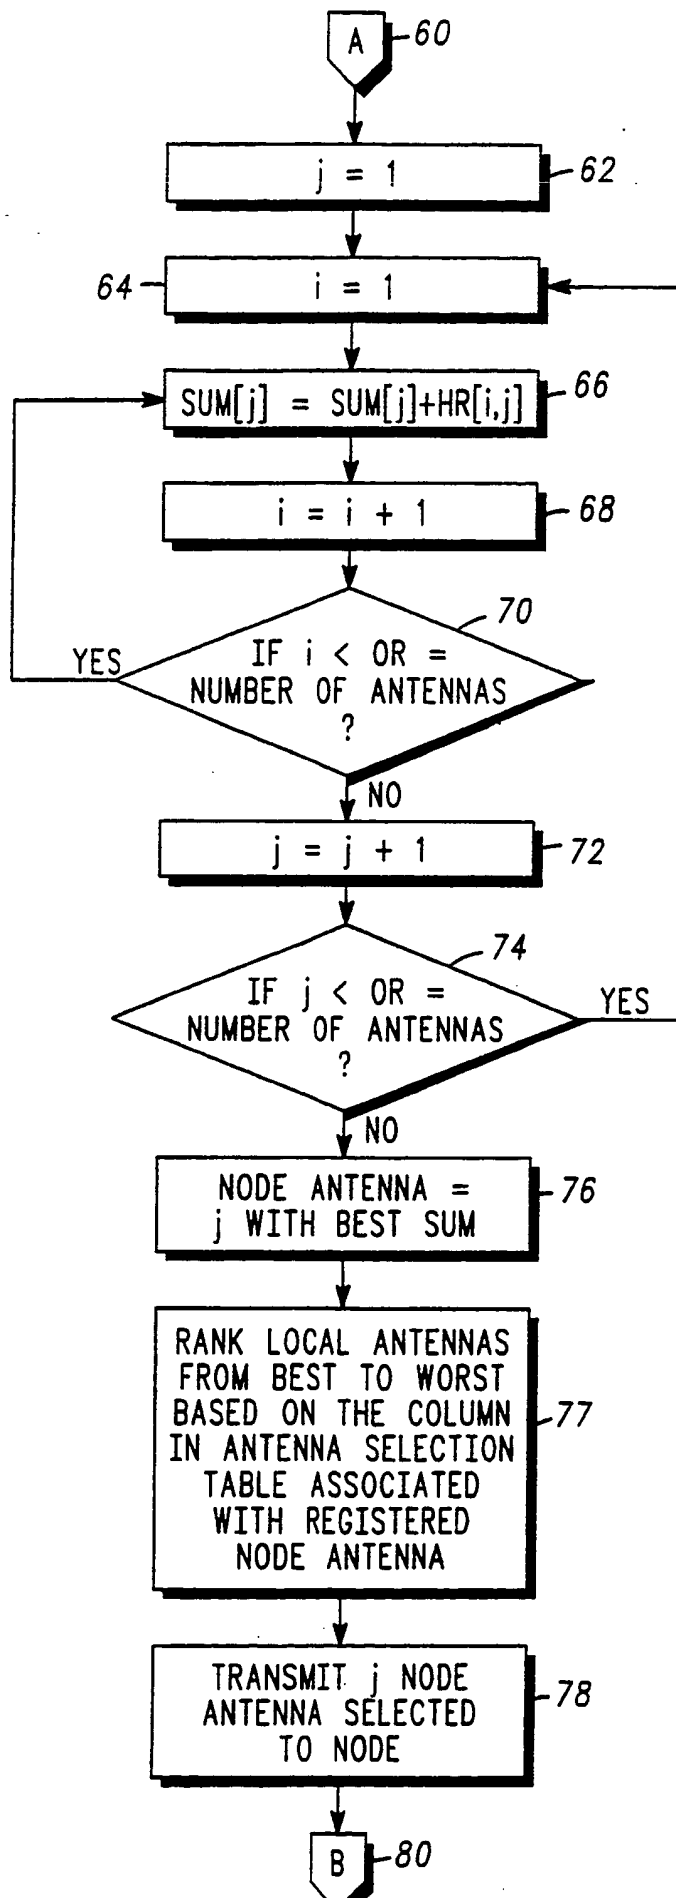


FIG. 5

4 / 5

FIG. 6

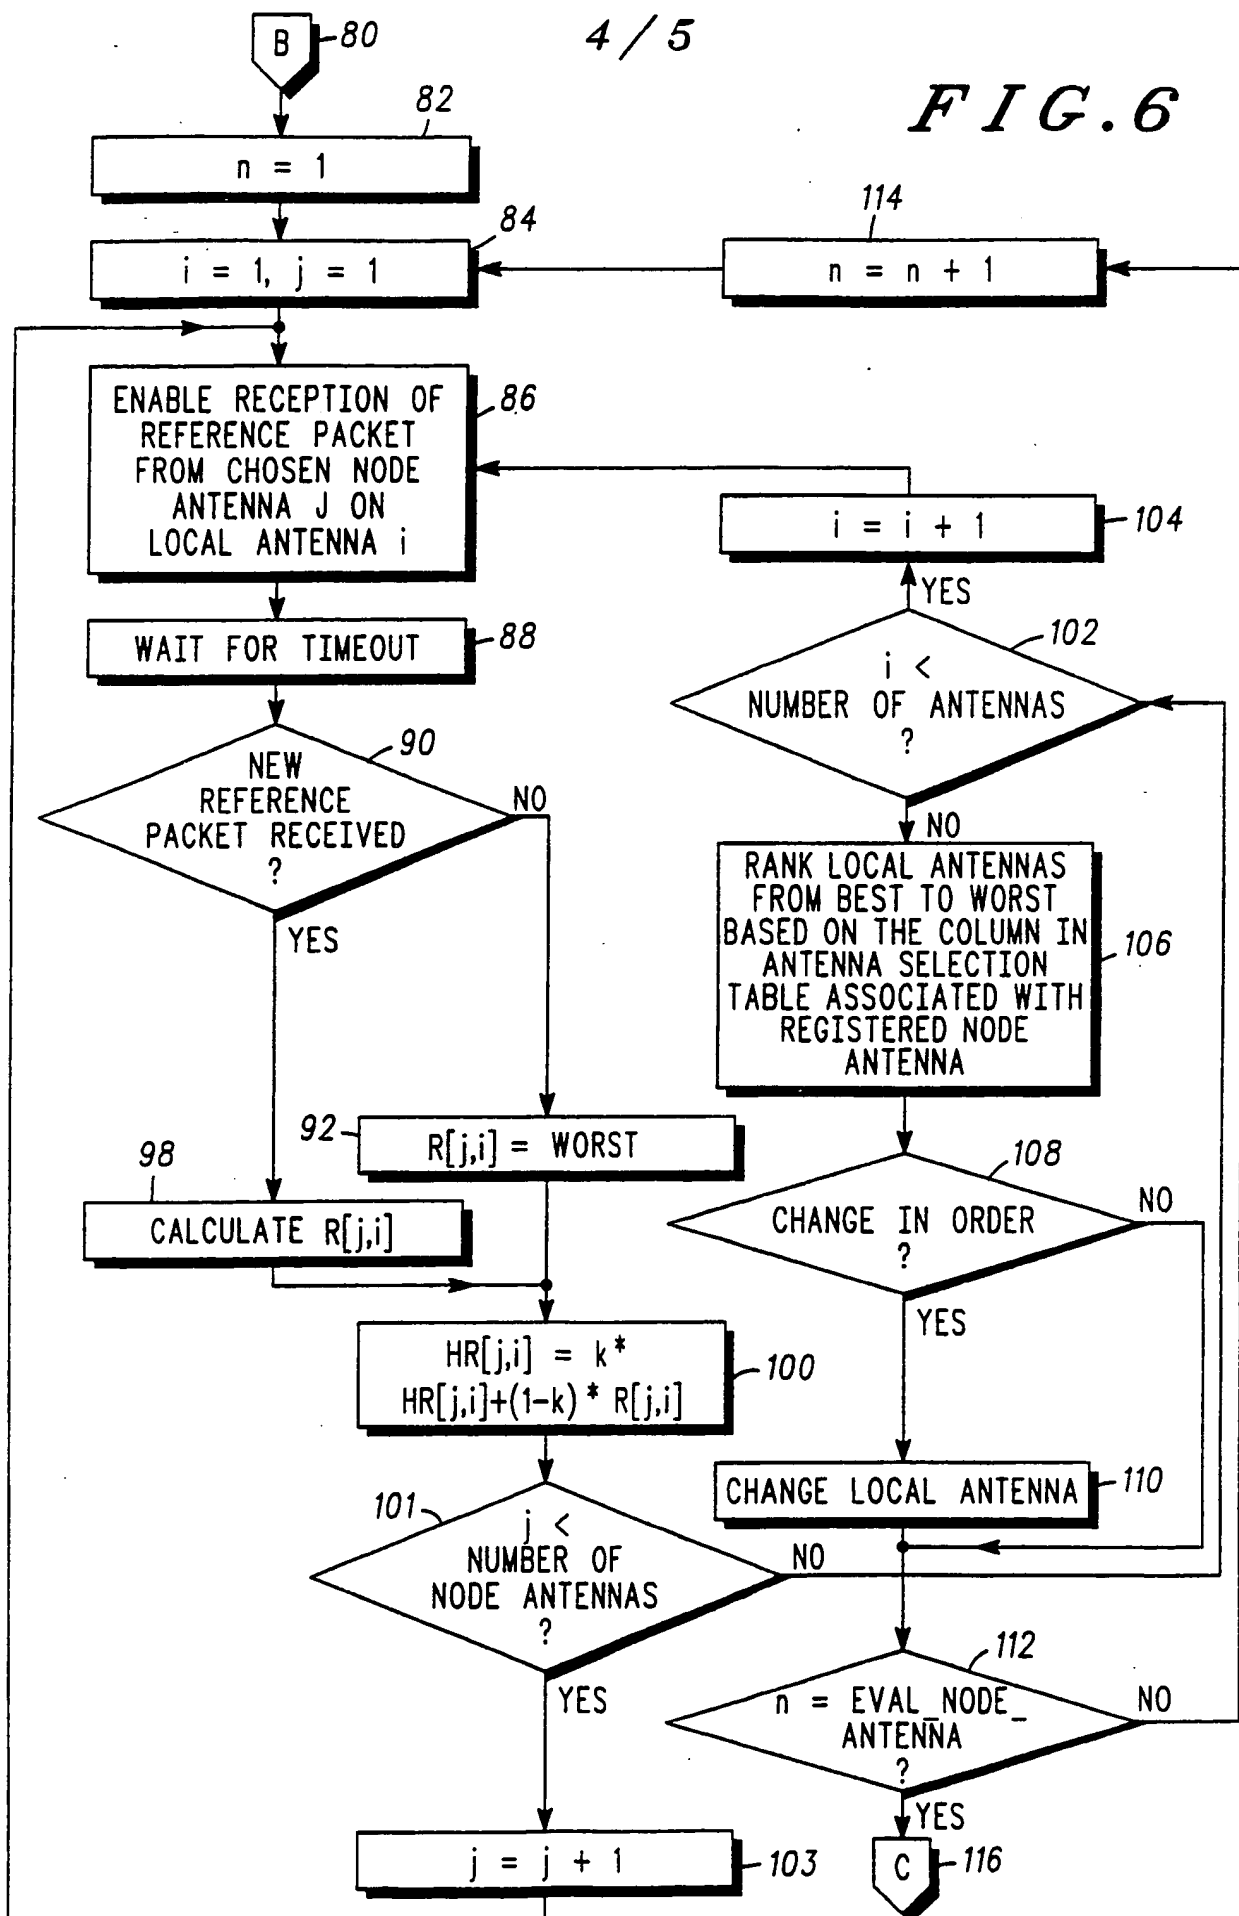

5 / 5

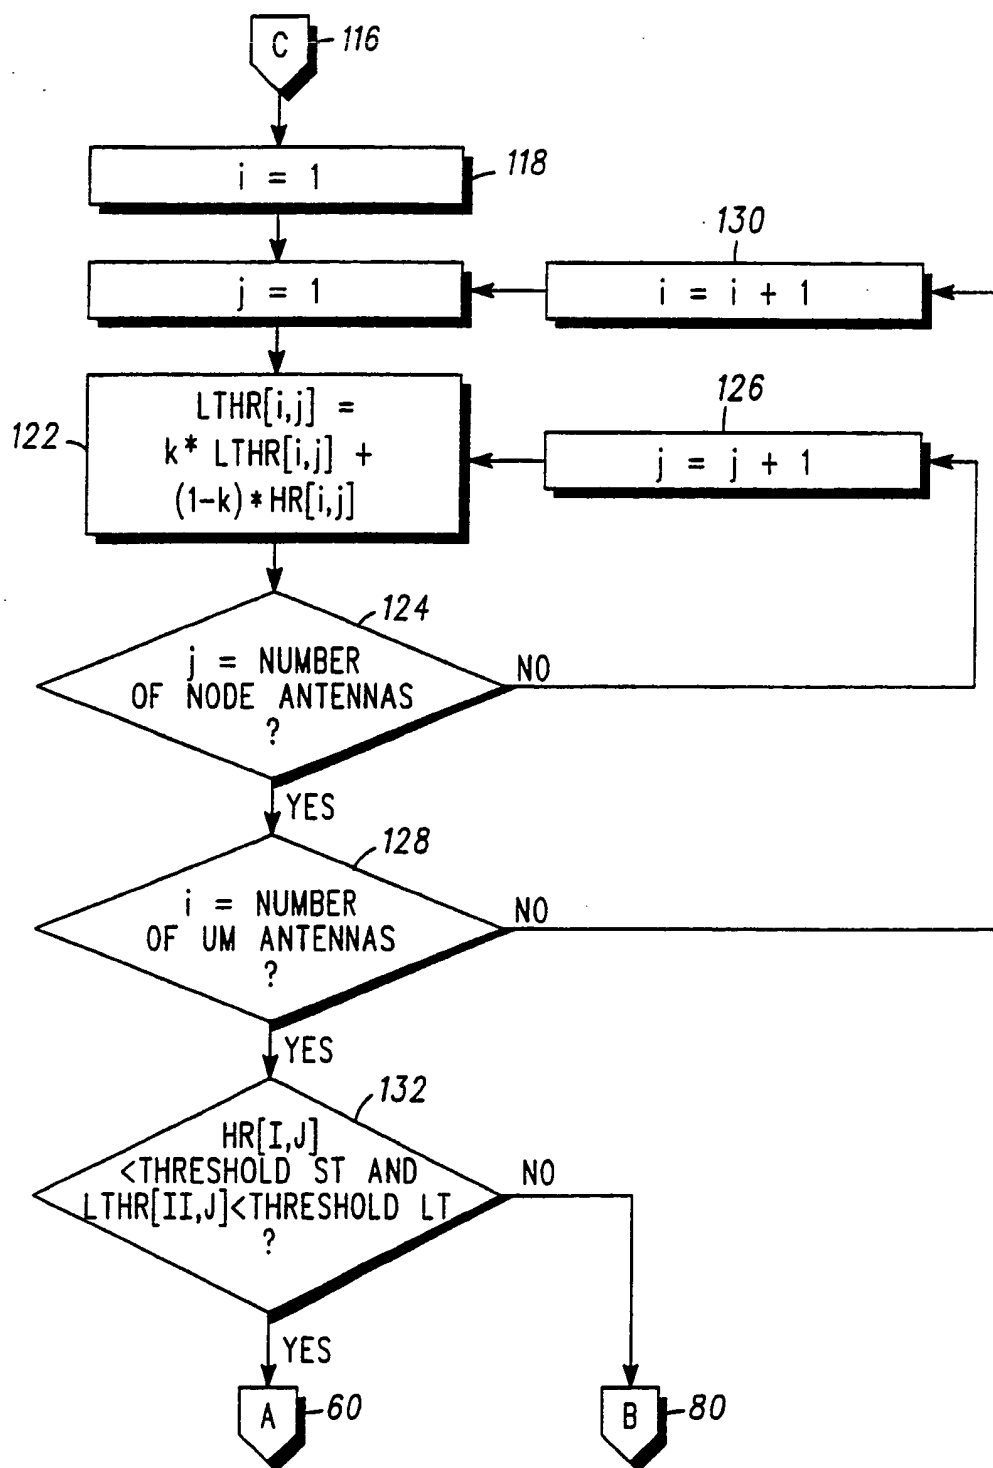


FIG. 7

INTERNATIONAL SEARCH REPORT

International Application No. **PCT/US91/07695**

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC(5): H04B 7/00; H04B 17/02; H01Q 3/02; H04Q 7/00 U.S. CL.: 342/367; 342/374; 455/133; 455/134; 455/135; 455/31														
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched ⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 30%; border-bottom: 1px solid black;">Classification System</th> <th style="border-bottom: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; vertical-align: top; padding: 5px;">U.S. CL.</td> <td style="border: 1px solid black; vertical-align: top; padding: 5px;">342/367, 374 455/133, 134, 135, 31, 33</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸</div>			Classification System	Classification Symbols	U.S. CL.	342/367, 374 455/133, 134, 135, 31, 33								
Classification System	Classification Symbols													
U.S. CL.	342/367, 374 455/133, 134, 135, 31, 33													
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%; border-bottom: 1px solid black;">Category [*]</th> <th style="border-bottom: 1px solid black;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="border-bottom: 1px solid black;">Relevant to Claim No. ¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">US, A, 4,317,229 CRAIG ET. AL., 23 FEBRUARY 1982 (In Its Entirety)</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,3,6</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="padding: 5px;">US, A, 3,781,890 BOYER, 25 DECEMBER 1973 (In Its Entirety)</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1,3,6,8</td> </tr> <tr> <td style="text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="padding: 5px;">US, A, 2,604,587 LYONS, 22 JULY 1952 (In Its Entirety)</td> <td style="text-align: center; vertical-align: top; padding: 5px;">1-10</td> </tr> </tbody> </table>			Category [*]	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	X	US, A, 4,317,229 CRAIG ET. AL., 23 FEBRUARY 1982 (In Its Entirety)	1,3,6	X	US, A, 3,781,890 BOYER, 25 DECEMBER 1973 (In Its Entirety)	1,3,6,8	A	US, A, 2,604,587 LYONS, 22 JULY 1952 (In Its Entirety)	1-10
Category [*]	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³												
X	US, A, 4,317,229 CRAIG ET. AL., 23 FEBRUARY 1982 (In Its Entirety)	1,3,6												
X	US, A, 3,781,890 BOYER, 25 DECEMBER 1973 (In Its Entirety)	1,3,6,8												
A	US, A, 2,604,587 LYONS, 22 JULY 1952 (In Its Entirety)	1-10												
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>[*] Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>														
IV. CERTIFICATION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> Date of the Actual Completion of the International Search 02 JANUARY 1992 </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> Date of Mailing of this International Search Report 10 JAN 1992 </td> </tr> <tr> <td style="vertical-align: top; padding: 5px;"> International Searching Authority ISA/US </td> <td style="vertical-align: top; padding: 5px;"> Signature of Authorized Officer REG-1: SEC-10 INTERNATIONAL DIVISION GREGORY C. ISSING </td> </tr> </table>			Date of the Actual Completion of the International Search 02 JANUARY 1992	Date of Mailing of this International Search Report 10 JAN 1992	International Searching Authority ISA/US	Signature of Authorized Officer REG-1: SEC-10 INTERNATIONAL DIVISION GREGORY C. ISSING								
Date of the Actual Completion of the International Search 02 JANUARY 1992	Date of Mailing of this International Search Report 10 JAN 1992													
International Searching Authority ISA/US	Signature of Authorized Officer REG-1: SEC-10 INTERNATIONAL DIVISION GREGORY C. ISSING													

THIS PAGE BLANK (USPTO)